

Scorpion 2112 J

ON ISUZU M21 GROUND BLUE H



PM Oil&Steel SpA

IT - 41018 S. Cesario Sul Panaro MO
Via G. Verdi, 22
tel. +39 059 936811 • fax +39 059 936804
info@oilsteel.it • www.oilsteel.com

Oil&Steel is a brand of Manitex International

OIL & STEEL
AERIAL PLATFORMS

AERIAL PLATFORM STANDARD EQUIPMENT

- Power takeoff with electrical start-up and automatic release
- Power takeoff ON with no handbrake warning siren
- Power takeoff hour counter fitted on the dashboard of the vehicle
- Warning lights on the hour counter inside the cabin showing PTO ON and outriggers outside the vehicle profile
- Start-up and shutdown of the main engine [and potential auxiliary engine] from the basket and from the column
- Engine emergency stop button from the basket and from the column
- Single-phase, 220 or 110 V AC power socket and differential overload switch fitted on the basket
- Moment detection and limiting system*
- Load detection and limiting system*
- Hand pump for emergency descent
- Aerial part controls: electro-hydraulic
- Outriggers controls: hydraulic
- Possibility to work with both front crosspieces fully opened, fully closed [one side fully opened – one side closed]
- Manual extension of front crosspieces
- Two-person aluminum basket with dimensions 1400x700x1100 mm
- Hydraulic rotation of the basket 90° right - 90° left
- Protective casing on the control box on the column and on the basket
- Lock valves on all cylinders
- Hydraulic circuit maximum pressure valves
- Anti-slip aluminum decking
- Standard painting white RAL 9016
- Hoses and cables inside booms
- Truck cabin anti-collision device

TRUCK STANDARD FEATURES

ISUZU M2I GROUND BLUE H wheelbase 3360 mm 1900 cc engine - 123 HP EGR - DPD – LNT

- Adjustable steering wheel (tilt and height)
- Power windows
- Manual headlamp leveling system
- Reverse warning beeper
- Front and rear fog lamps
- Day-time running lights immobilizer
- Central Locking with remote control
- Sun visor (driver's seat)


* Available, upon request, both versions

OPTIONAL


- Boom and platform treated using corrosion-resistant paint, screws in stainless steel
- Water air-line supply to the basket
- Hydraulic extension of outriggers [instead of standard manual extension]
- Electro-hydraulic extension of outriggers and stabilizers [instead of standard manual extension]
- Underride guards
- Underride guards with plastic toolbox [only if plastic toolbox is included as optional]
- Fiberglass basket 1400 x 700 x 1100 mm [instead of standard]
- Fiberglass basket 1400 x 700 x 1100 mm + insulation 1 KV [instead of standard]
- Aluminum basket with door [instead of standard]
- Kit 4 nylon outrigger plates [under the platform deck]
- Kit 4 nylon outrigger plates [placed on the rear left side]
- Tilt sensor [standard with electro-hydraulic stabilization]
- 12V DC socket
- 12V DC socket + Working light 60W on basket
- Kit 2 harnesses with rope
- Plastic toolbox with dimensions 480 x 400 x 400mm under the deck
- Moment limiting device
- Basket rotation with rotary actuator [instead of standard]
- Automatic stabilization from the ground
- Rear central and left aluminum flatbeds
- Kit junction protection
- Electrical pump 12V DC 1.6 kW for emergency descent
- Auxiliary single-phase 220 V AC - 2.2 kW electrical pump [electrical control panel and battery charger powered by an external source]
- Auxiliary single-phase 110 V AC - 2.2 kW electrical pump [electrical control panel and battery charger powered by an external source]
- Magnetic 12 V revolving orange light for truck cabin
- Magnetic 12 V revolving blue light for truck cabin
- Two magnetic 12 V revolving orange lights for truck cabin + bar
- Two magnetic 12 V revolving orange lights for truck cabin + trifflesh bar
- Red and white reflective decals on truck
- Fixed panels with height 100mm / 150 mm / 200 mm
- Drop-down panels on 1 side (right) with height 100 mm / 150 mm / 200 mm
- Drop-down panels on 2 sides with height 100 mm / 150 mm / 200 mm
- Extended warranty 2 years [+1 year in addition to standard warranty conditions]
- Extended warranty 3 years [+2 years in addition to standard warranty conditions]
- Air conditioning system
- Homing function [automatic shut-down of the aerial part]
- Working height limiting device
- Led lights on stabilizers
- Painting of the truck cabin different from standard
- Painting different from standard

LOAD CELL VERSION


CROSSBEAMS FULLY OPENED

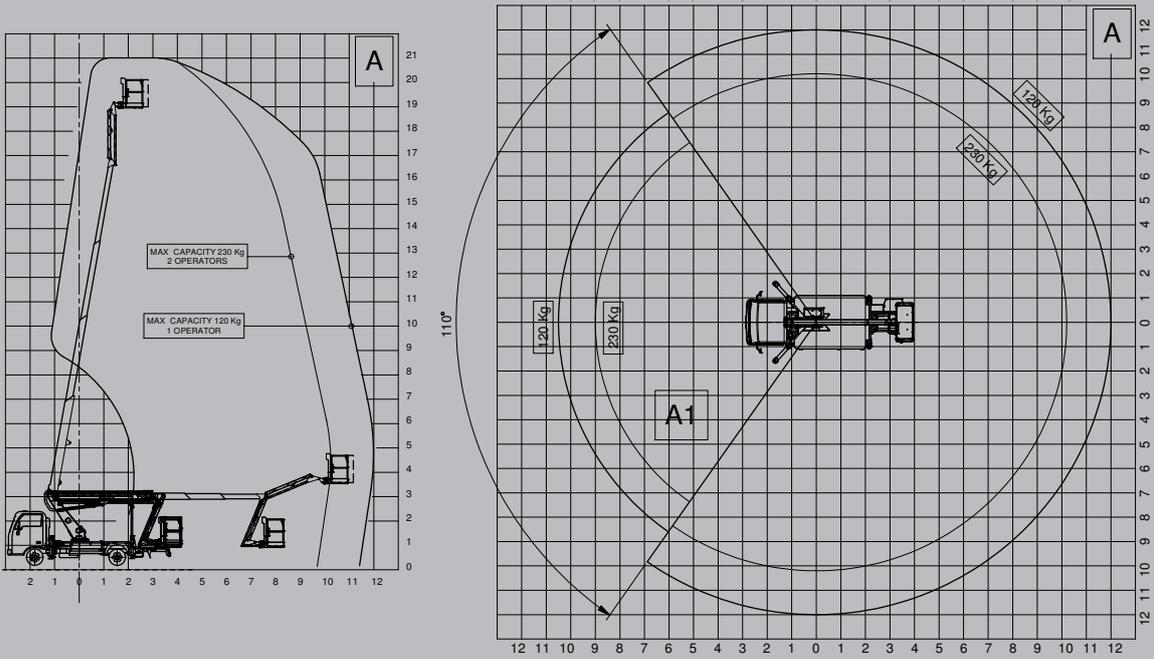



CROSSBEAMS ONE SIDE FULLY CLOSED

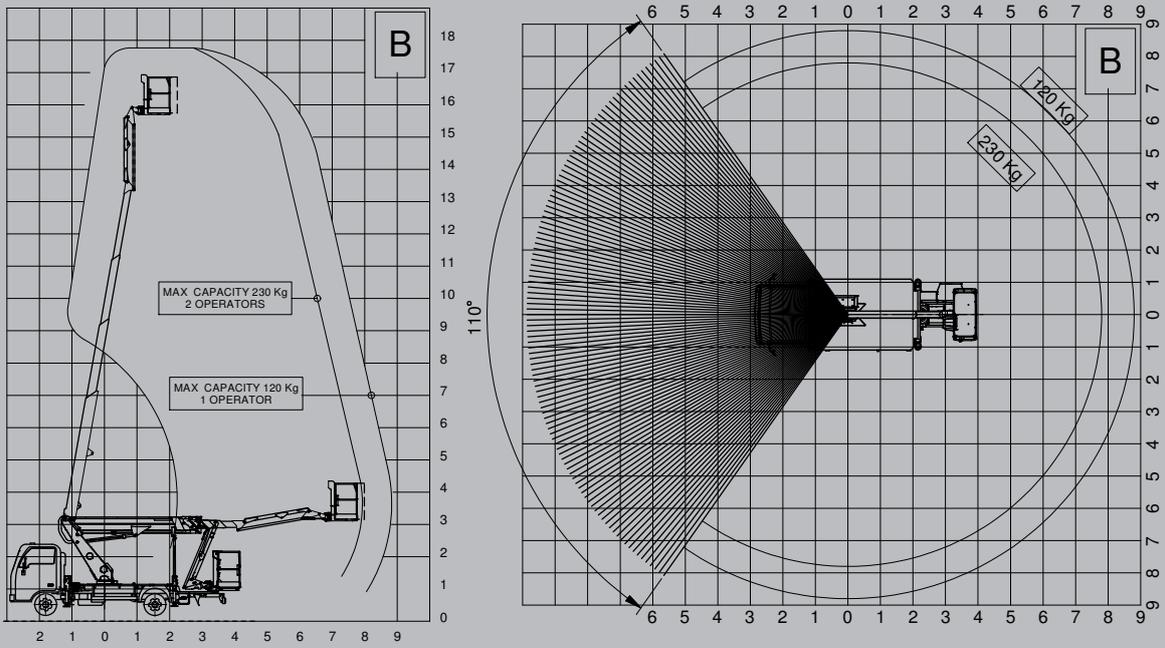

CROSSBEAMS ONE SIDE FULLY OPENED ONE SIDE CLOSED

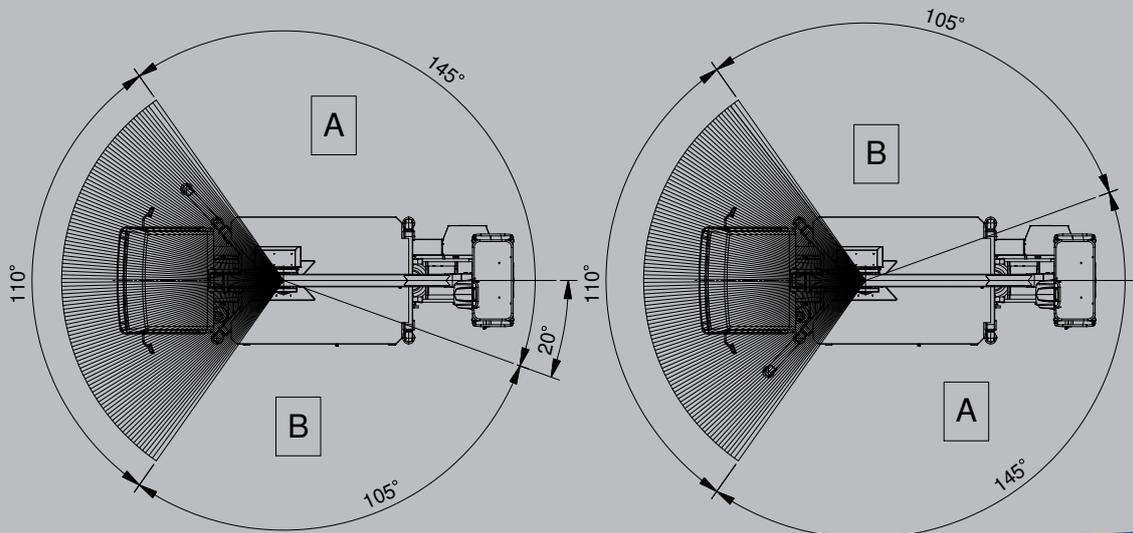

Scorpion 212 J

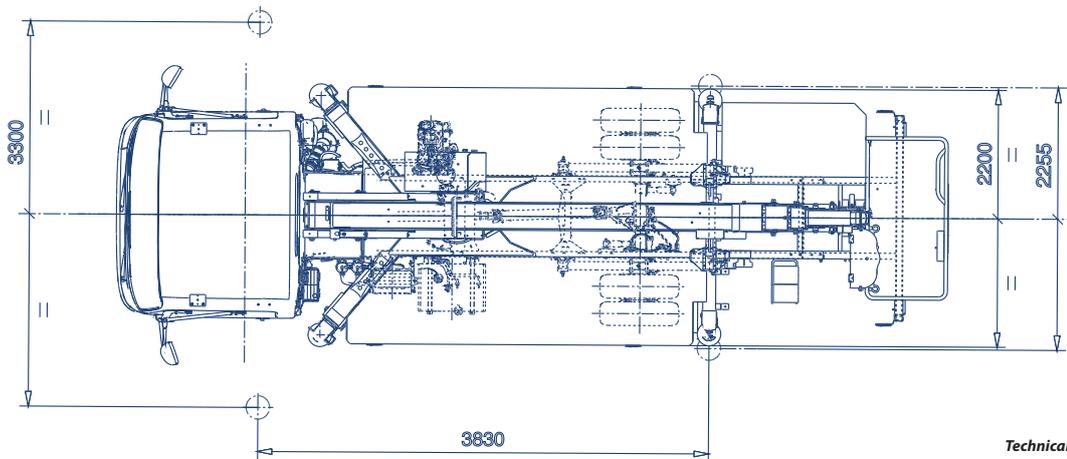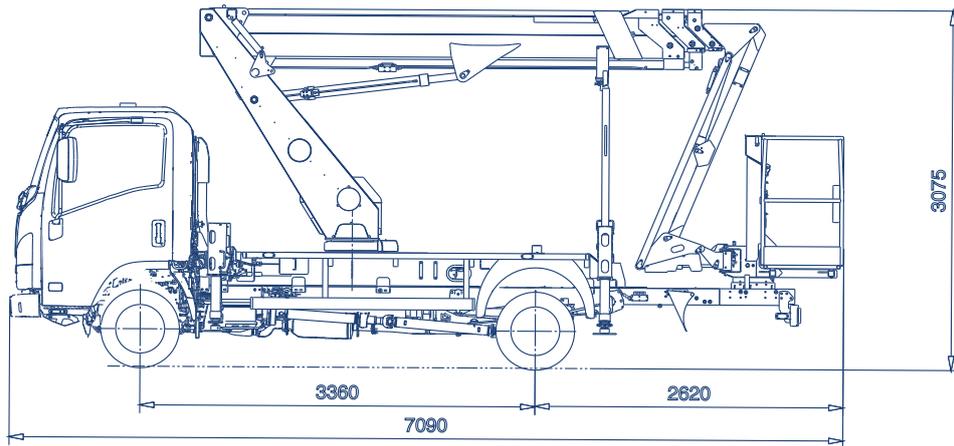

Technical data are purely indicative

TECHNICAL FEATURES

Max working height (m)	21 m
Max outreach (m)	12 m
Max basket capacity	225 kg
Basket dimensions	1400x700xh1100 mm aluminum [Fiberglass as optional]
Controls	Aerial part: electro-hydraulic Outriggers: hydraulic
Turret rotation	400°
Basket rotation	90° left + 90° right
Outriggers	H Type
Machine length:	7090 mm
Machine height:	3075 mm
Machine width	2200 mm

All technical data, descriptions and illustrations are purely indicative and subject to change at PM Oil&Steel own discretion and without notice

PM Oil&Steel SpA

IT - 41018 S. Cesario Sul Panaro MO

Via G. Verdi, 22

tel. +39 059 936811 • fax +39 059 936804

info@oilsteel.it • www.oilsteel.com

Oil&Steel is a brand of Manitex International

OIL & STEEL
AERIAL PLATFORMS